

Etabloc 065-040-125 GG

ETB 065-040-125-GGSBV11 WSEBI4HHB

Operating point 2

Dimensioning operating point

Operating conditions (purchaser requirements)

Target flow rate	
Target head	
Fluid	Water, heating water
Fluid variant	Heating water up to 100°C (max.), acc. to VDI 2035
Specified fluid temperature	20 °C
Density Fluid handled	998 kg/m³
Kinematic viscosity Fluid handled	1 mm²/s

Vapour pressure determined	0.02337 bar.a
Minimum inlet pressure required	-0.3 bar.r
Specified ambient temperature	20 °C
Installation altitude above sea level	1,000 m

Operating conditions (performance)

Flow rate	29.05 m³/h
Minimum permissible flow rate	4.522 m³/h
Head	10.94 m
Shut-off head	12.56 m
Efficiency Pump	77.29 %
NPSH required	0.7 m

Maximum power input at duty point	1.117 kW
Maximum power input / curve	1.321 kW
Pump speed	2,011 1/min
Discharge pressure-max.	1.229 bar.r

Operating point 1

Operating conditions (purchaser requirements)

Target flow rate	29.05 m³/h
Target mass flow rate	8.053 kg/s
Target head	9.51 m
Fluid	Water, heating water
Fluid variant	Heating water up to 100°C (max.), acc. to VDI 2035
Specified fluid temperature	20 °C
Density Fluid handled	998 kg/m³
Kinematic viscosity Fluid handled	1 mm²/s

Vapour pressure determined	0.02337 bar.a
Minimum inlet pressure required	-0.3 bar.r
Specified ambient temperature	20 °C
Installation altitude above sea level	1,000 m

Operating conditions (performance)

Flow rate	29.05 m³/h
Minimum permissible flow rate	4.274 m³/h
Head	9.51 m
Shut-off head	11.22 m
Efficiency Pump	77.25 %
NPSH required	0.68 m

Maximum power input at duty point	0.9712 kW
Maximum power input / curve	1.116 kW
Pump speed	1,901 1/min
Discharge pressure-max.	1.098 bar.r

Etabloc 065-040-125 GG

ETB 065-040-125-GGSBV11 WSEBI4HHB

Design data pump

Scope of supply Pump supplied by KSB	Pump + motor	Mains voltage	400 V
Pump standard	EN 733	Mains frequency	50 Hz
Shaft axis position	Horizontal	Minimum efficiency index MEI	0.8
Pump design	Close-coupled	Minimum permissible fluid temperature	0 °C
Pump system design	Single-pump system	Maximum permissible fluid temperature	110 °C
Pump direction of rotation, viewed from casing side	Counterclockwise	Quantity Stages, single-entry	1
Hydraulic impeller diameter	139 mm	Casing wear ring design suction-side	Flat
Impeller type	Radial, closed, multi-channel	Casing wear ring design discharge-side	Without
Free passage	9.6 mm	Installation chamber Casing cover	Conical (A-type cover)
Support foot	Yes	Bearing bracket size / shaft unit	25
		Pump directive	CE

Nozzle connections pump

Nominal diameter Suction nozzle	DN 65	Nominal diameter Discharge nozzle	DN 40
Nominal pressure Suction nozzle	PN 16	Nominal pressure Discharge nozzle	PN 16
Suction nozzle position	Axial	Discharge nozzle position	0 deg
Suction nozzle design acc.to	EN1092-2	Discharge nozzle design acc.to	EN1092-2
Suction flange bolt hole pattern as per standard	EN1092-2	Discharge flange bolt hole pattern as per standard	EN1092-2
Flange facing type Inlet	Raised face (B,RF)		
Flange facing type Outlet	Raised face (B,RF)		

Auxiliary connections pump

6B Fluid Drain	G 1/4 Drilled and plugged	1M Pressure gauge Discharge nozzle	Without Without
6D Fluid Filling and venting	G 1/4 Drilled and plugged	1M Pressure gauge Suction nozzle	Without Without
5B Venting and drain	G 1/4 Drilled and plugged		

Etabloc 065-040-125 GG

ETB 065-040-125-GGSBV11 WSEBI4HHB

Shaft sealing

Shaft seal type	Single mechanical seal; seal chamber can be vented (A-type casing cover) - AV	Shaft seal code	Code 11
Operating mode of mechanical seal (function)	API plan 03	Shaft seal manufacturer inboard	KSB's choice
Determined pressure Seal chamber	0.62 bar.r	Mechanical seal type inboard	KSB's choice
		Material Shaft seal inboard	BQEGG DW001

Materials

Material Volute casing (102)	EN-GJL-250/A48 CL 35B	Material Bolts/Screws Volute casing (902.01)	8.8
Material Casing cover (161)	EN-GJL-250/A48 CL 35B	Material Nut Impeller fastening (920.95)	(ST)
Material Shaft	C45+N		
Material Impeller (230)	EN-GJL-250/A48 CL 35B		
Material Casing wear ring suction-side (502.01)	JL/LAMELLAR GRAPHITE CAST IRON		
Material Shaft protecting sleeve (523)	(CRNIMO ST INT)		
Material Static seal Discharge cover	DPAF DW001		
Material Drive lantern	EN-GJL-250/A48 CL 35B		

Etabloc 065-040-125 GG

ETB 065-040-125-GGSBV11 WSEBI4HHB

Power Drive System

Drive concept	Electric actuator	Rated speed Motor	1,500 1/min
Drive standard, mechanical	IEC	Number of motor poles	4
Drive standard electric	IEC	Rated power Motor	1.5 kW
Motor manufacturer	KSB	Motor power reserve determined	33.6 %
Motor construction type	IM V1 (IM3011) IEC 60034-7	Rated voltage Motor	400 V
Motor size	90L	Motor winding	- / 400 V
Efficiency class	IE4 (Super Premium)	Rated frequency Motor	50Hz
Material motor housing	AL	Motor switching type	Star
Enclosure Motor	IP55 (TEFC)	Maximum current Unit	0 A
Thermal class	155 (F) according to IEC 60085	Rated current Motor	4 A
Temperature sensor motor	3 PTC thermistors	Starting current ratio Ia/In	1.1
Terminal box position of motor (looking at the motor shaft)	360 °	Input voltage and frequency	Without
Operation on a frequency inverter permitted	Required by design	Cos phi at 4/4 load	0.67
Sound pressure level Motor	60 dBa	Motor efficiency at 4/4 load	88.2 %
Type series Motor manufacturer	SuPremE D1	M12 Connection	Without
		Additional IO board	Without
		Field bus module	Without
		Marking according to directive CE Drive	

Coating

Aggregate

Surface preparation	Free from dirt, grease, rust
Properties Primer coat	Hydro dip primer, water-dilutable
Thickness Primer coat	60 µm
Properties Top coat	Acrylate dispersion water-thinned
Thickness Top coat	40 µm
Colour Top coat	RAL5002 Ultramarine Blue

Etabloc 065-040-125 GG

ETB 065-040-125-GGSBV11 WSEBI4HHB

Energy cost and Environmental Impact

Result

Estimated Product Carbon Footprint (cradle-to-gate) (CO₂eq) 224 kg

*

This PCF indication is based on the product mass assuming the typical shares of materials in use. The conversion rate between product mass and CO₂ emissions is based on several life cycle assessments acc. to ISO14040 / 14044 of sample products of the same type series. Objective and scope of these LCAs was defined as being limited to the manufacturing phase (cradle-to-gate). With regard to inputs, all materials, energy and auxiliary materials were accounted for, and with regard to outputs, emissions, scrap and waste were accounted for. The impact of outbound logistics is not covered. The assessments' input variables cover at least 95 % of the total product mass. The analysis focuses exclusively on the Global Warming Potential (EF3.0 Climate Change – total).

Packaging

Suitable for transport	Truck transport
Suitable for storage	Indoor storage
Packaging category	KSB's choice (A0)


Performance Curve (Pump)



Page: 1 / 1

Etabloc 065-040-125 GG

ETB 065-040-125-GGSBV11 WSEBI4HHB

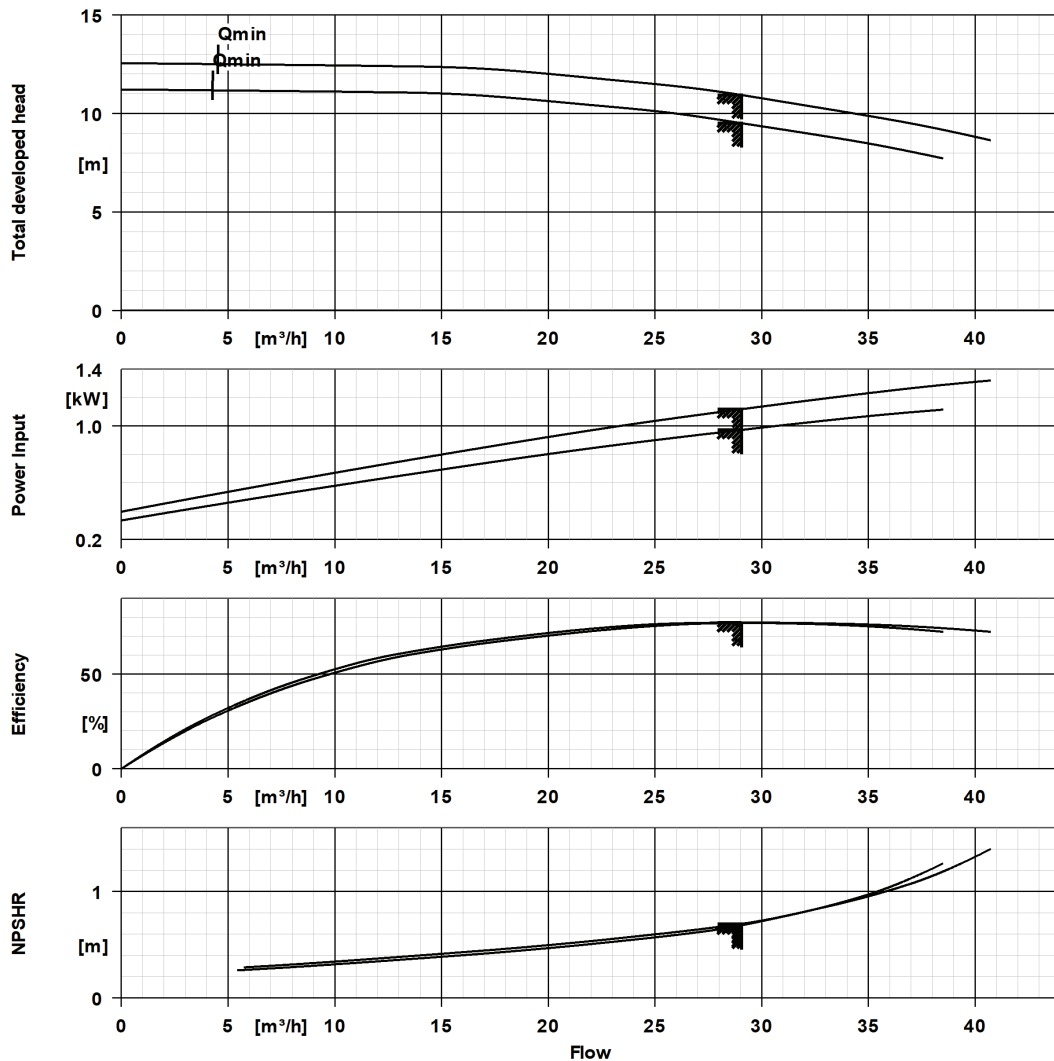


Curve Data

Pump speed	2,011 1/min	Efficiency Pump	77.3 %
Density Fluid handled	998 kg/m³	Minimum efficiency index MEI	0.8
Kinematic viscosity Fluid handled	1 mm²/s	Maximum power input at duty point	1.12 kW
Flow rate	29.1 m³/h	NPSH required	0.7 m
Head	10.9 m	Hydraulic impeller diameter	139 mm
		Hydraulic calculation according to standard/class	EN ISO 9906 Class 3B

Etabloc 065-040-125 GG

ETB 065-040-125-GGSBV11 WSEBI4HHB

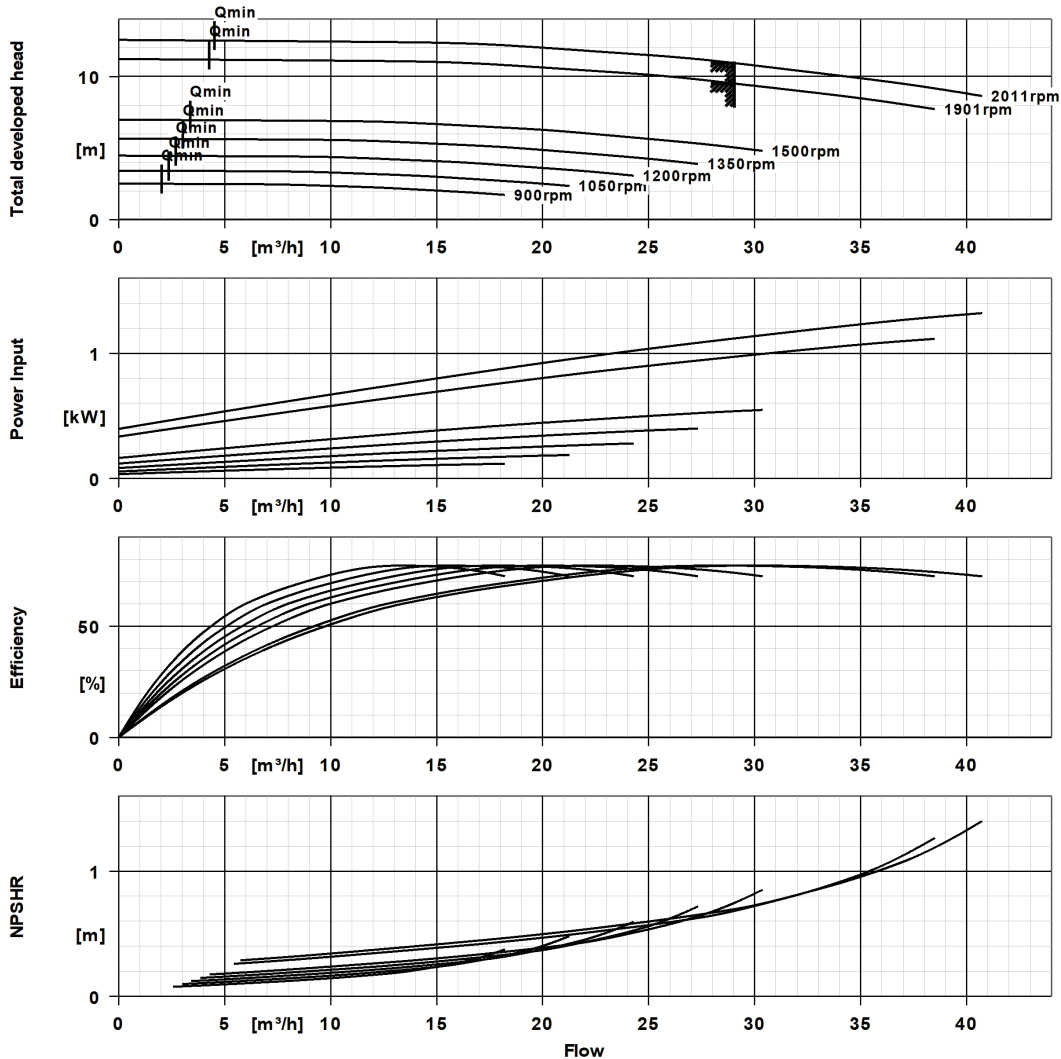


Curve Data

Density Fluid handled	998 kg/m^3	Minimum efficiency index MEI	0.8
Kinematic viscosity Fluid handled	1 mm^2/s	Hydraulic impeller diameter	139 mm
Flow rate	29.05 m^3/h	Head	10.94 m

Etabloc 065-040-125 GG

ETB 065-040-125-GGSBV11 WSEBI4HHB

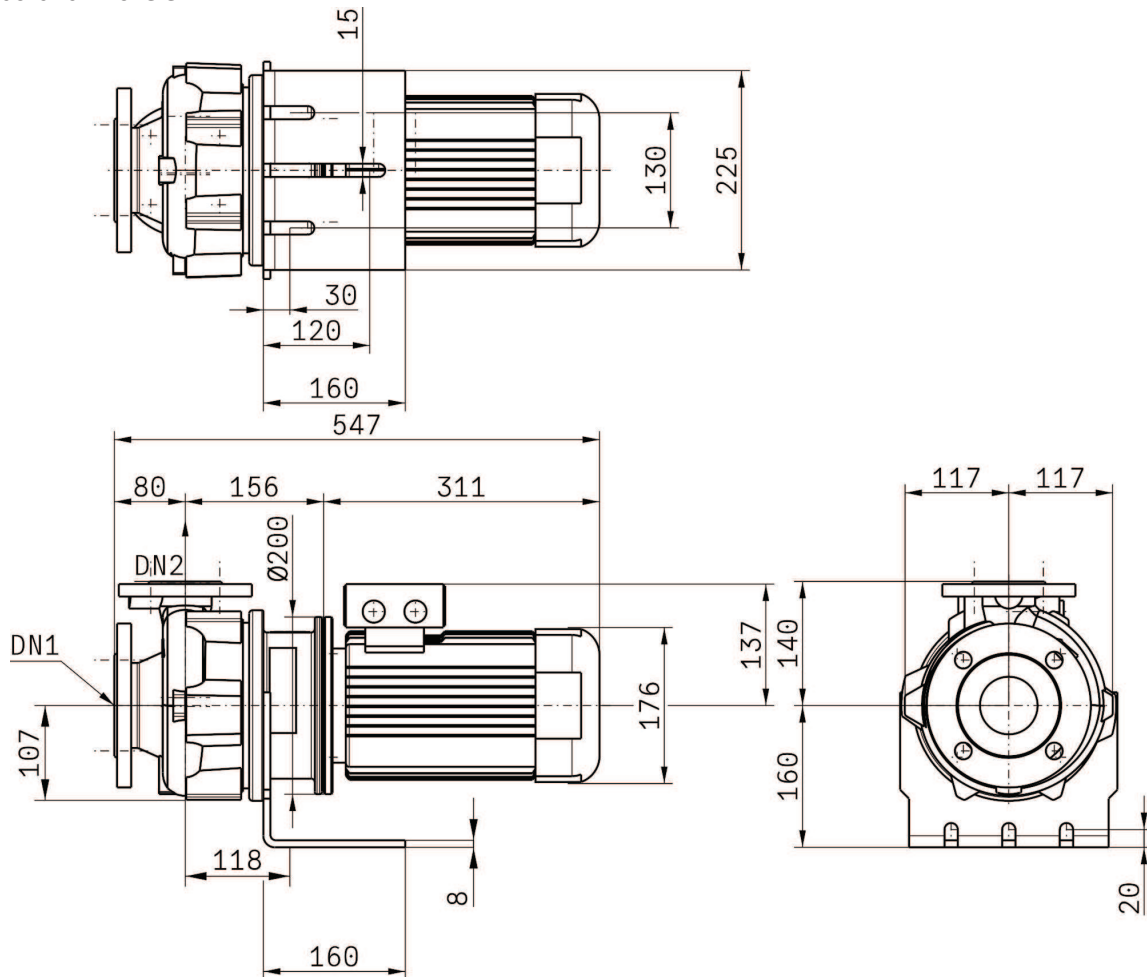

Drawing is not to scale.

Dimensions are given in mm

Motor

Electric motor	No
Rated power Motor	1.5 kW
Rated speed Motor	1,500 1/min

Connections

Nominal diameter Suction nozzle	DN 65
Suction flange bolt hole pattern as per standard	EN1092-2
Nominal diameter Discharge nozzle	DN 40
Discharge flange bolt hole pattern as per standard	EN1092-2
Nominal pressure Suction nozzle	PN 16
Nominal pressure Discharge nozzle	PN 16



Etabloc 065-040-125 GG

ETB 065-040-125-GGSBV11 WSEBI4HHB

Net weight


Total weight Pump	28.42 kg
Total weight Drive	18 kg
Total weight Pump set	46.42 kg

Connect pipelines stress-free

Dimensional tolerances for shaft axis height: DIN 747
Dimensions without tolerances, middle tolerances to: ISO 2768-m
Connection dimensions for pumps: EN735
Dimensions without tolerances - welded parts: ISO 13920-B
Dimensions without tolerances - gray cast iron parts: ISO 8062-CT9

Plan for additional connections see extra drawing

Etabloc 065-040-125 GG
ETB 065-040-125-GGSBV11 WSEBI4HHB

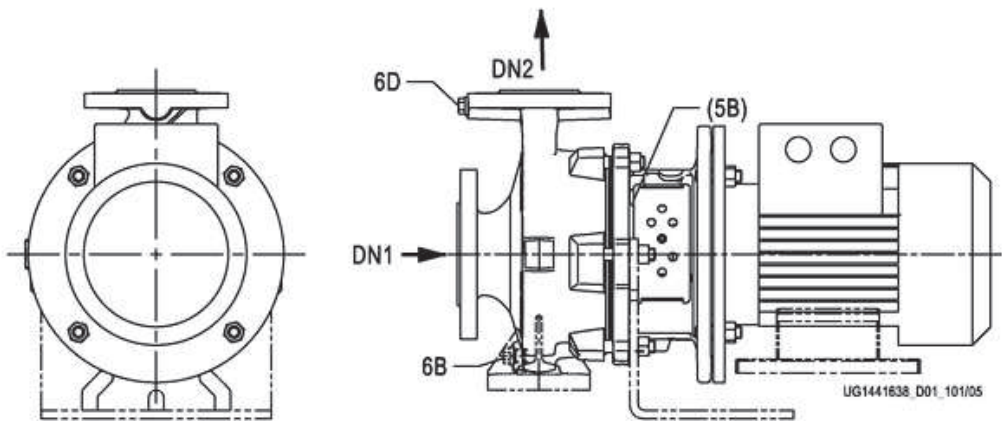

Connections

6B Fluid Drain
6D Fluid Filling and venting

G 1/4	Drilled and plugged
G 1/4	Drilled and plugged

5B Venting and drain

G 1/4	Drilled and plugged
-------	---------------------